

rotronic

Datenblatt - Fiche technique - Data sheet

11.99.5564




**VALUE Verlängerungskabel DVI, DVI ST-BU, (24+1) dual link,
3,0m**

VALUE Câble DVI, DVI M-F, (24+1) dual link, 3,0m

**VALUE Monitor DVI Cable, DVI M – DVI F, (24+1) dual link,
3.0 m**


3000 ± 40mm

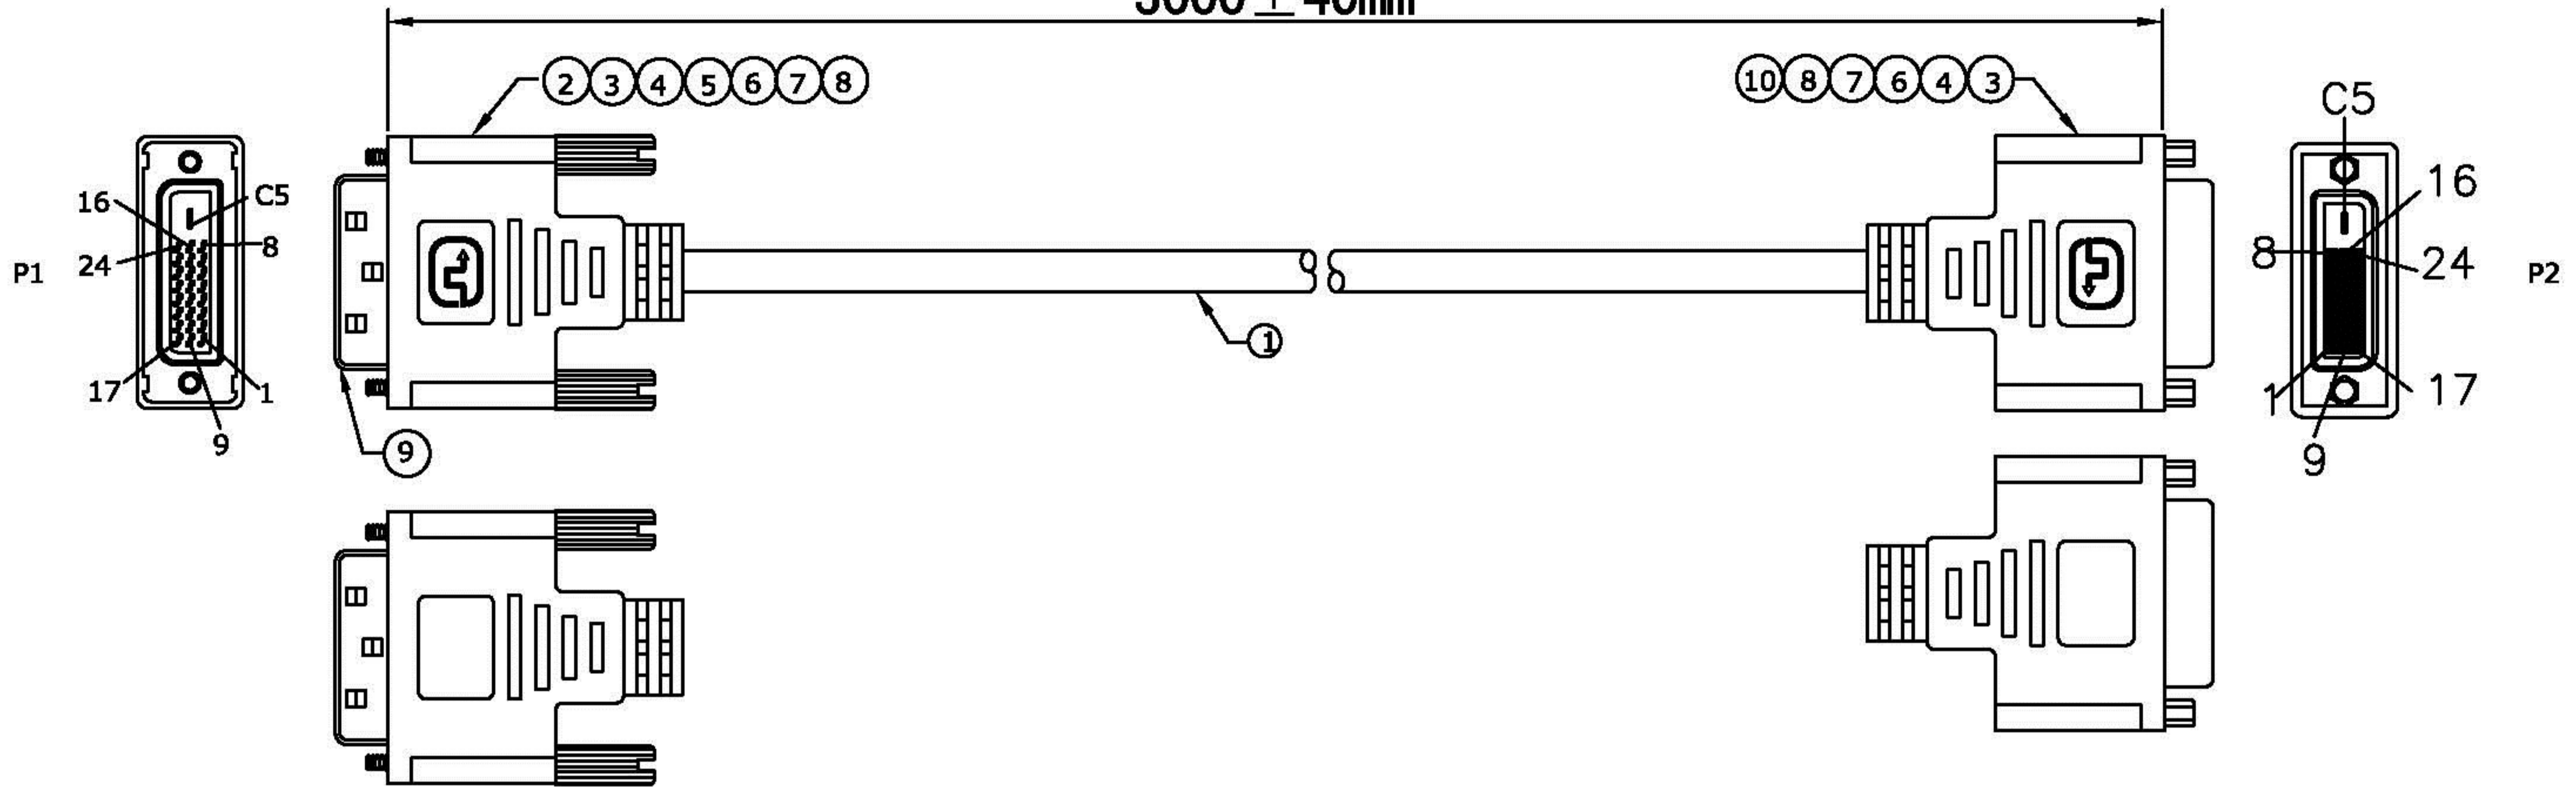

ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

PIN Assignment

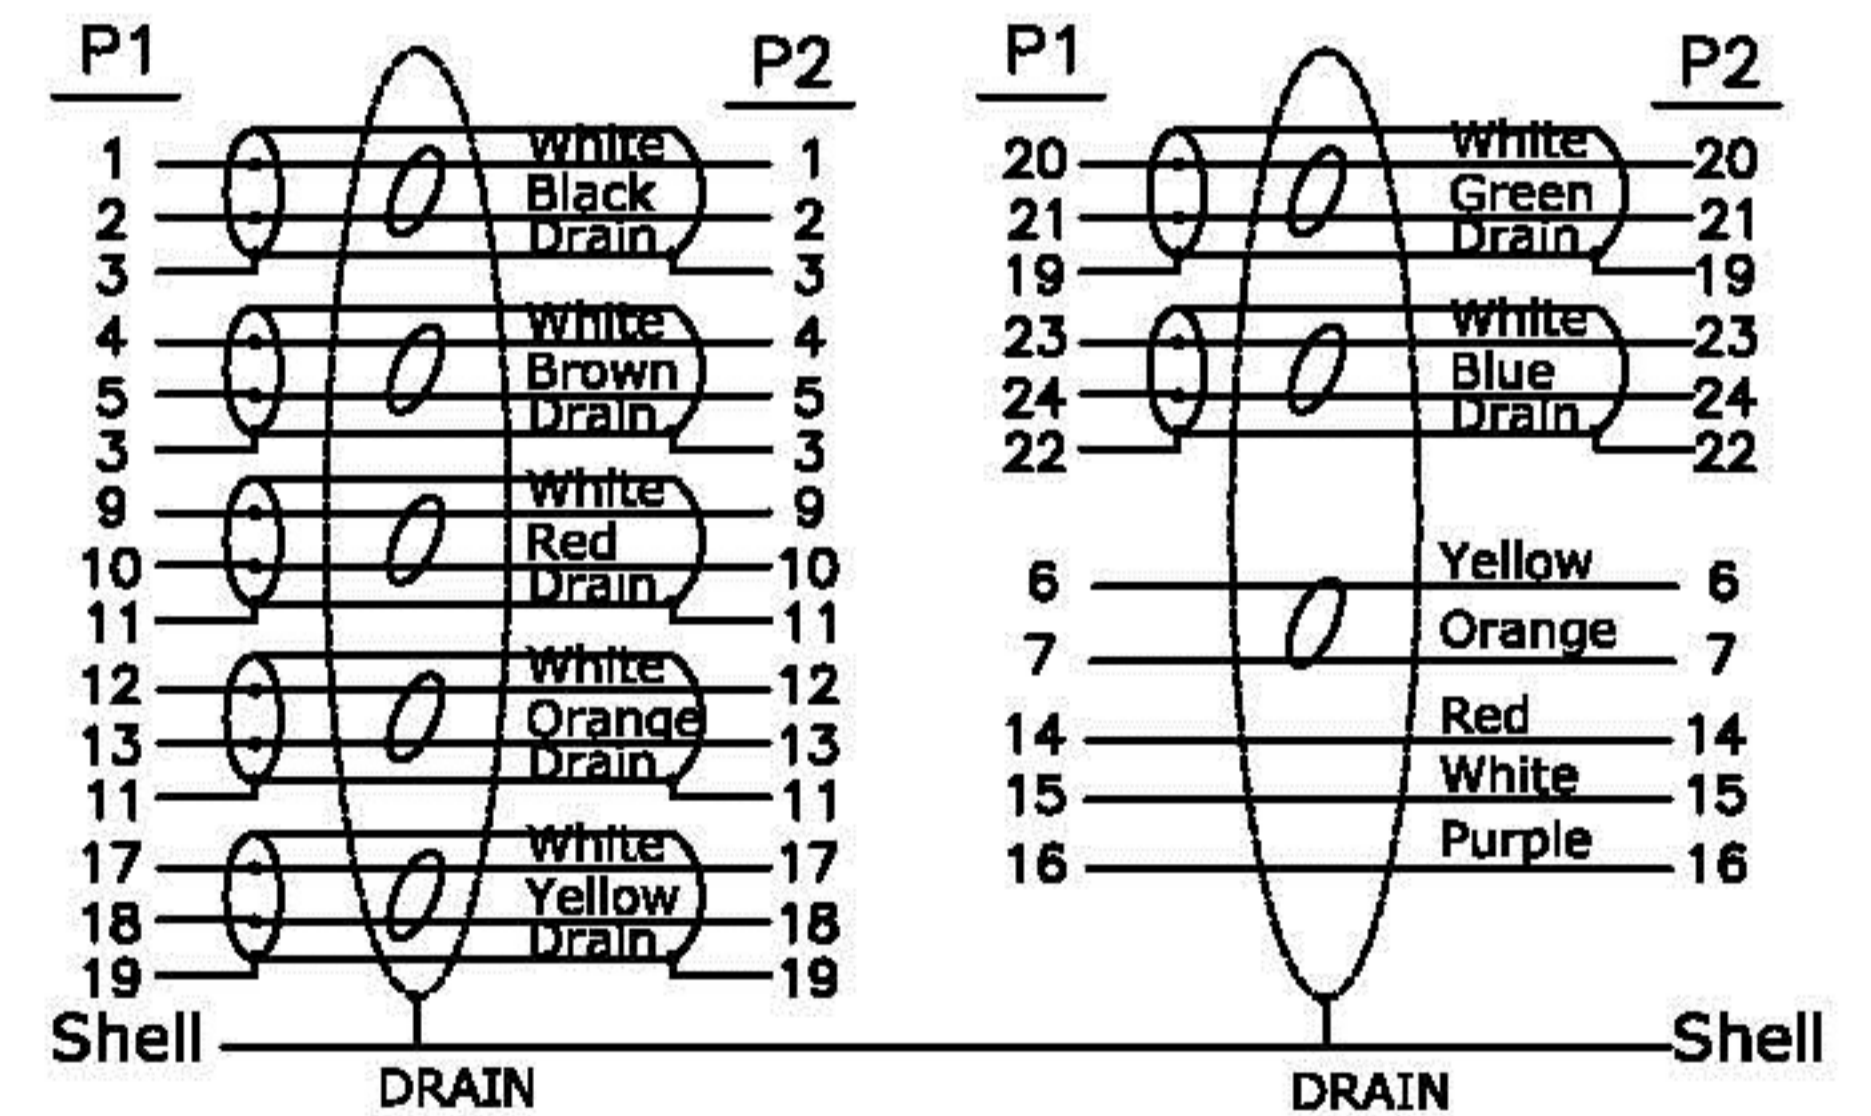

10	A2-R023278	DVI(24+1)F Solder shell nickel plated with nut insulation :Black	1	pcs
9	A6-0000025	DVI M Dust cap	1	pcs
8	A10-R075073	H.S.T: φ 1.5*20mm*2pcs Black	0.04	m
7	A10-R075002	H.S.T: φ 1.0*12mm*14pcs Black	0.168	m
6	A10-R075005	H.S.T: φ 2.5*14mm*14pcs Black	0.196	m
5	A7-R040001	#4-40UNC 2.8*45MM Nickel plated	2	pcs
4	A5-R047001	45P Black PVC	70	g
3	A5-R047011	Transparent PE	10	g
2	A2-R020051	DVI(24+1)M Solder Shell nickel plated insulation:Black	1	pcs
1	A4-R001215	UL20276 (30AWG*1P+EAM)*7C+30AWG*1P+30AWG*3C+AEB 85%AL OD:7.3MM Black	L	M
NO	ITEM	DESCRIPTION	Q'TY	UNIT

	TOLERANCE	
	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Rotronic Co., Ltd.

DRAWN BY		joe		TITLE:		VALUE DVI Cable, DVI M-F, Dual Link, 3m	
CHECK BY				CUSTOMER :			
APPD BY				CUSTOMER P/N :		11.99.5564	
		SCALE		NONE		DRAWING NO.:	
		UNIT		MM		CA1790086	
		DATE		12.05.28		REV. A	
						1/1	